




AF SERIES MIXERS

Motor driven high speed mixers for small tanks (200 - 500 lt) capacity, with shaft bearings sealed by a "V" ring to protect from external vapours. Motor 4 pole, 1400 rpm. Mixer support flange made of polycarbonate mounted directly on the tank. Shaft and impeller in polypropilene covering a steel core. Impeller flow cone type.

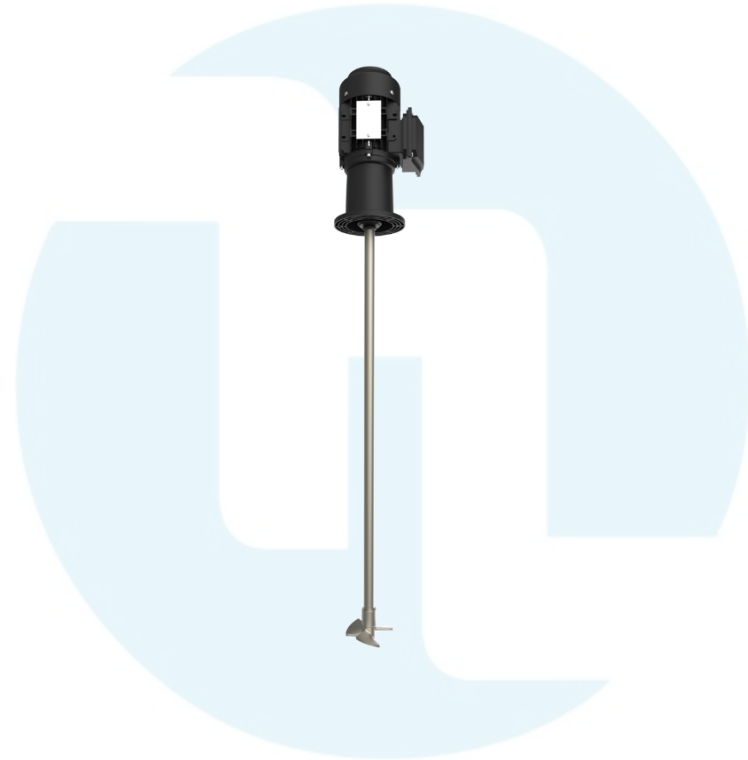

TECHNICAL FEATURES AND CODES

Type	Motor power	Shaft length	Power supply	Code
PP-AF 1-6-4	0.18 kW	600 mm	230/400 V-50 Hz 3Ph	EGT22410003
PP-AF 1-6-4	0.18 kW	600 mm	230 V - 50 Hz 1Ph	EGT22420003
PP-AF 1-7-4	0.18 kW	700 mm	230/400 V - 50 Hz 3Ph	EGT22410303
PP-AF 1-7-4	0.18 kW	700 mm	230 V - 50 Hz 1Ph	EGT22420303
PP-AF 1-8-4	0.18 kW	800 mm	230/400 V - 50 Hz 3Ph	EGT22410103
PP-AF 1-8-4	0.18 kW	800 mm	230 V - 50 Hz 1Ph	EGT22420103
PP-AF 1-10-4	0.18 kW	1000 mm	230/400 V - 50 Hz 3Ph	EGT22410403
PP-AF 1-10-4	0.18 kW	1000 mm	230 V - 50 Hz 1Ph	EGT22420403
AISI316L-AF 1-6-4	0.18 kW	600 mm	230/400 V - 50 Hz 3Ph	EGT22410001
AISI316L-AF 1-6-4	0.18 kW	600 mm	230 V - 50 Hz 1Ph	EGT22420001
AISI316L-AF 1-8-4	0.18 kW	800 mm	230/400 V - 50 Hz 3Ph	EGT22410101
AISI316L-AF 1-8-4	0.18 kW	800 mm	230 V - 50 Hz 1Ph	EGT22420101
AISI316L-AF 1-10-4	0.18 kW	1000 mm	230/400 V - 50 Hz 3Ph	EGT22410401
AISI316L-AF 1-10-4	0.18 kW	1000 mm	230 V - 50 Hz 1Ph	EGT22420401



DIMENSIONS

