




PLASTIC BODY RX ELECTRODE

Redox (ORP) electrode designed with a durable polycarbonate body. Measuring range: ± 1000 mV. The electrode is available with different cable lengths and S7 screw connector. Alternative electrode types or cable lengths upon request.

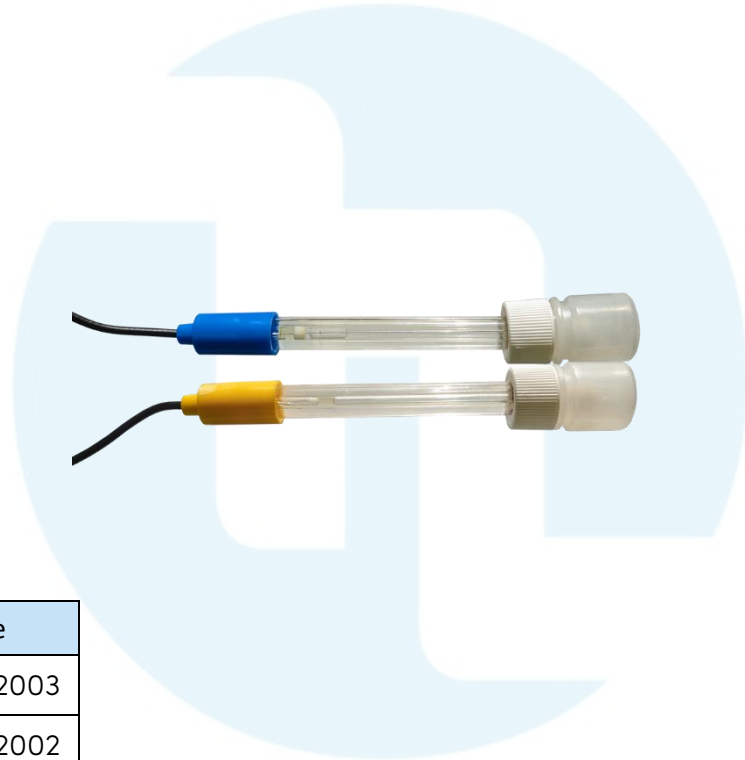

TECHNICAL FEATURES AND CODES

Type	Connection	Pressure	Temperature	Code
Rx	6 m cable	4 bar	60°C	AEL0002003
Rx	1 m cable	4 bar	60°C	AEL0002002
Rx	With screwable connector	5,5 bar	60°C	AEL0007801



SUGGESTED: coaxial cable for electrodes with screw connectors

Description	Code
0,50 m	2105044
1 m	SCV0000302
3 m	2105003
5 m	2105004
9 m	2105005
15 m	2105007



Headquarter: 54/18 Bui Quang La, An Hoi Tay Ward, HCMC, Vietnam
Branch office: 77 DHT10B, Dong Hung Thuan Ward, HCMC, Vietnam
Phone: (028) 6258 5368 – (028) 6291 9568
Email: info@atswatertechnology.com
Website: www.atswatertechnology.com

